

▶ Aluhall 5,4 H



- ▶ Logistics & Industrial
- ▶ Sport & Leisure
- ▶ Event & Exhibition
- ▶ Tent Rental Companies

| | | | | | | | | | | |
|-------------|-------|------|------|------|--|--|--|--|--|--|
| Width | 10 m | 15 m | 20 m | 25 m | | | | | | |
| Side height | 5,4 m | | | | | | | | | |




Its classical shape, free interior space and combination possibilities, make the Aluhall versatility in tent form. A hall suited for various activities from company and private parties, trade shows and exhibitions, sports and cultural events, over industrial purposes like storage space, workshops, ...to sport applications like covering for tennis courts, swimming pools, ... in short an ideal solution!

In addition you can finish the hall as you choose amongst others with **doors**, **glass windows**, **gothic windows**, **cargo doors**, **transparent fabric**, **hard panels**, **decoration**, **guttering**, **flooring**, **lighting**, **heating**.


Accessories



Cross section drawing

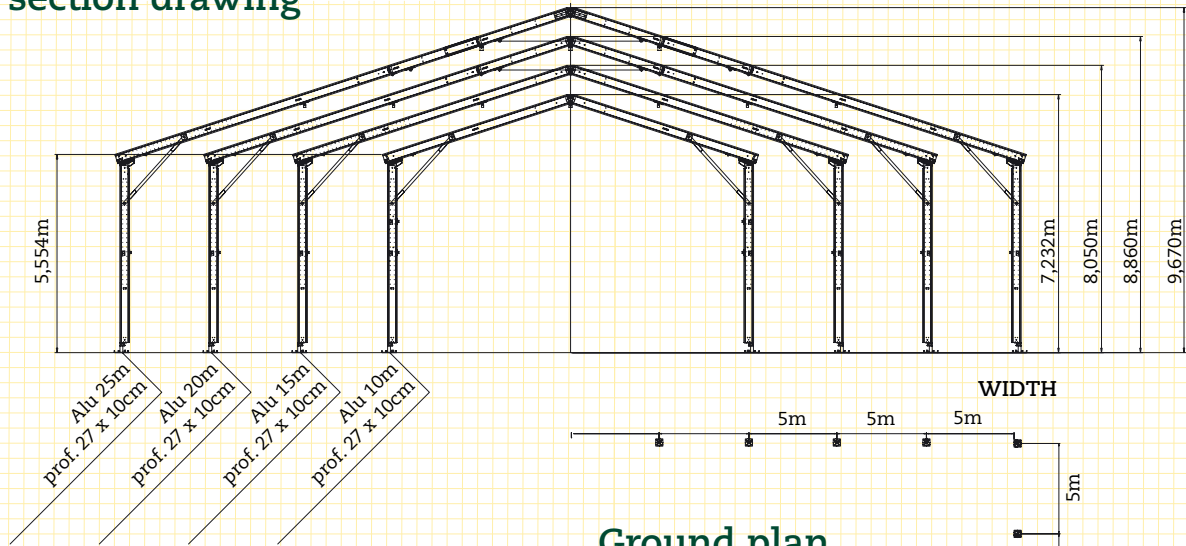

Ground plan

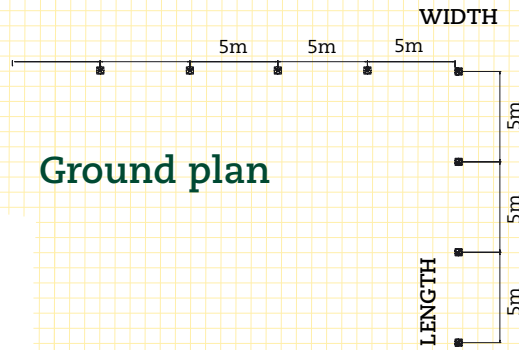

Construction

It is a self-supporting anodised aluminium construction that rests on galvanised steel base-plates or ground beams. The standard anchoring is realised with stakes. All parts are connected with pins for quick and easy installation. The stability is ensured using wind bracing. The structure is subject to the most important international building standards (e.g. the British "Building Codes", the Germany "Prüfbuch" standard, the French "Extrait du registre de sécurité", etc.).

Roof and gable fabrics

Roof and gable fabrics are made from PVC-coated polyester fabric (white translucent, white non-translucent or colour). Roof and gable fabrics are slid into the keder tracks of the roof beams and stretched with tension tubes and ratchets or fabric tensioners. Flame retardant according to the French standard M2, German standard DIN 4102 B1 and British Standard BS 5438. The fabric is UV-stabilised and treated against deterioration due to rot and mildew.

Technical specifications

| | |
|-----------------|-----------|
| Standard width | 10 - 25 m |
| Standard length | Unlimited |
| Side height | 5,4 m |
| Bay distance | 5 m |

Sidewalls

The sidewall fabrics are made from PVC coated polyester fabric (white translucent, white non-translucent or colour). Flame retardant according to the French standard M2, German standard DIN 4102 B1 and British Standard BS 5438. The fabric is UV-stabilised and treated against deterioration due to rot and mildew. One sidewall of 5 m is made up of two sections of 2.5 m connected with a zip. The sidewall slides into the leg with a keder in the keder tracks. The sidewall is attached to the connection bar or ground beam at the bottom with straps and at the top the side fabric is slid into the side purlin with keder sections. This prevents the fabric from flapping in strong winds.



Veldeman Structure Solutions ▶ Industrieterrein Vostert 1220 ▶ 3960 Bree (Belgium)

Tel.: +32 (0)89 47 31 31 ▶ Fax: +32 (0)89 47 37 77 ▶ E-mail: info@veldemangroup.be ▶ Website: www.veldemangroup.be